

# PRODUCT SPECIFICATION


## HIGH TEMPERATURE CABLES

### RHH A05SJ-K (SIAF/GL)



RHH A05SJ-K for high temperature usage. Tin plated flexible copper conductor (1) with silicone rubber (2) and silicone coated fiberglass braid (3) isolation.

- Working temperature from  $-60^{\circ}\text{C}$  up to  $+200^{\circ}\text{C}$  (Peak  $+230^{\circ}\text{C}$ )
- Working voltage 500 V
- Test voltage 2000 V
- Breakdown voltage  $>5000$  V

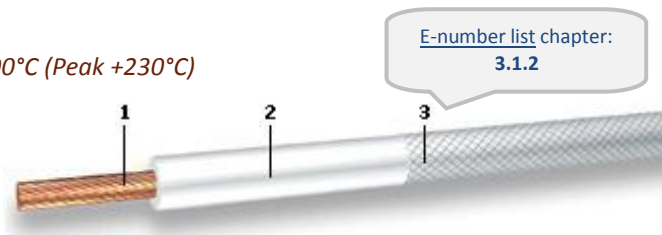

E-number	Section (mm <sup>2</sup> )	Outer diameter (mm)	Cable weight (kg/km)
03 862 92	25	10,8	339,8
03 863 02	35	12	453,3
03 863 10	50	14,1	642,2
03 863 20	70	16,2	881
03 863 30	95	18,6	1184,8
03 863 40	120	20,6	1483,1
03 863 50	150	22,3	1814,9
03 863 60	185	25,2	2267,9

Visit  
[www.tibe.se](http://www.tibe.se)  
 E-mail  
[tibe@tibe.se](mailto:tibe@tibe.se)  
 Call  
 +46(0)8-546 80 200