

# PRODUCT SPECIFICATION


## HIGH TEMPERATURE CABLES

### RHH H05SJ-K



RHH H05SJ-K for high temperature usage. Tin plated flexible copper conductor (1) with silicone rubber (2) and silicone coated fiberglass braid (3) isolation.

- Working temperature from  $-60^{\circ}\text{C}$  up to  $+180^{\circ}\text{C}$  (Peak  $+230^{\circ}\text{C}$ )
- Working voltage 500 V
- Test voltage 2000 V
- Breakdown voltage  $>5000$  V

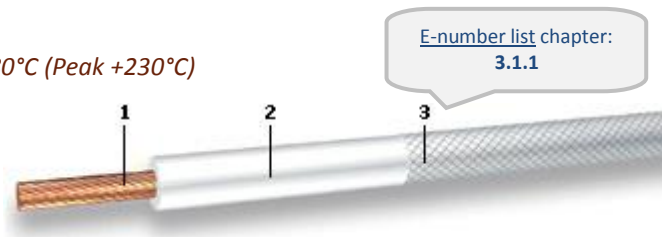

E-number	Length (m)	Section (mm <sup>2</sup> )	Outer diameter (mm)	Cable weight (kg/km)
03 862 12	100	0,75	3,0	15,9
03 862 22	100	1	3,1	18,6
03 862 32	100	1,5	3,6	26,5
03 862 35	750	1,5	3,6	26,5
03 862 42	100	2,5	4,2	39,9
03 862 52	100	4	4,6	56,0
03 862 62	100	6	5,6	83,8
03 862 72	100	10	7,2	137,9
03 862 82	100	16	8,4	208,5

Visit  
[www.tibe.se](http://www.tibe.se)

E-mail  
[tibe@tibe.se](mailto:tibe@tibe.se)

Call  
 +46(0)8-546 80 200