



CETAVER[®] SLEEVING AND TUBULAR BRAID "PN"

1/1

06/07

B 1

1 - CONSTRUCTION

- Round and hollow glass fiber E braid with tight stitches.
- Coated with HYPALON.
- Sleevings : Round braid - Tubular braid : Flat braid.



2 - CHARACTERISTICS

ELECTRICAL and PHYSICAL

- Heat resistance: - 30 + 155°C Thermal CLASS : F Dry Dielectric strength : 500 to 1000 volts

- Good resistance to abrasion - Good resistance to raising temperature

Coating and colour resist to temperature rise but coating may harden

PHYSICO - CHEMICAL

A = little or no effect

B = moderate effect

C = important effect


A - Acetic (acid 30%)
 A - Acetic (anhydride)
 B - Acetone
 A - Ammonia (anhydride)
 A - Ammonia (gas)
 C - Benzene (benzol)
 C - Benzoyl (chloride)
 B - Benzoic (alcohol)
 C - Carbon (sulphide)
 A - Carbon (oxide)
 C - Carbon (tetrachloride)
 A - Castor oil (castor oil plant)
 A - Tung oil
 B - Chlorine (dry)
 A - Diacetone (alcohol)
 C - Dibenzylether
 C - Dibutylether
 A - Diethyle (sebaccetic)

C - Dictyl (phthalic)
 C - Ether (ethylic ether)
 C - Ethyl (acetate)
 A - Ethylic (alcohol)
 C - Ethylbenzene
 A - Ethyl cellulose
 B - Ethyl (chloride)
 C - Ethylene (dichloride)
 A - Ethyleneglycol
 A - Formaldehyde - 40%
 A - Formaldehyde - 40% (70°C)
 A - Formic (acid)
 A - Formic- freon 12 (liquid)
 A - fuel oil
 A - Gasoline (petrol)
 A - Glycerine
 A - Hydrogene
 B - Kerozene
 B - Lubricants (oils)
 A - Methylic (alcohol)
 B - Mineral (oil)

A - Nitric - acid (10%)
 A - Nitric - acid (70%)
 C - Nitrobenzene
 A - Oxygen
 A - Petrol (oil)
 A - Phosphoric - acid (85%)
 A - Propylic (alcohol)
 A - Sodium (peroxyd)
 A - Soya (oil)
 B - Steam
 A - Sulfuric - acid (up to 50%)
 C - Toluene
 C - Tributylphosphate
 C - Trichlorethylene
 A - Triethanolamine
 C - Turpentine
 A - Water

3 - APPLICATIONS

- Insulations of cables in machines class F.
- Allows to mark out with different colours. Bindings.

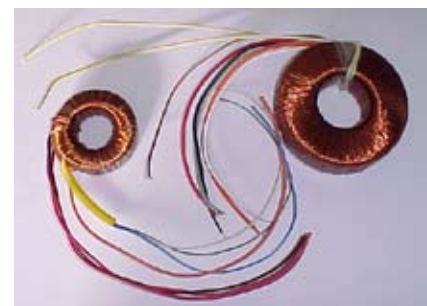

4 - PRESENTATION

- Conditioning: jaws bobbins.
- Plastic : type P - Cardboard : type C.
- Colours : blue - white - red - yellow - green - black.

Resists to heat, humidity.
 Protect them at an ambient temperature.

DIAMETER mm	LENGTH per BOBBIN - M	DIAMETER mm	LENGTH per BOBBIN - M	DIAMETER mm	LENGTH per BOBBIN - M	DIAMETER mm	LENGTH per BOBBIN - M
0,5	P4 : 300m	2,0	P2 : 200m	4,0	C1 : 250m	8,0	C1 : 200m
0,8	P4 : 250m	2,5	P3 : 300m	5,0	C1 : 200m	10,0	C2 : 200m
1,0	P4 : 200m	3,0	P3 : 250m	6,0	C1 : 150m	12,0	C2 : 150m
1,5	P2 : 300m	3,5	C1 : 350m	7,0	C1 : 100m	16,0	C2 : 080m