



# E. BOURGEOIS


## TERYL<sup>®</sup> TAPE WITH “TEXTURED YARN”

1/1  
01/03

# G 9

### 1 - CONSTRUCTION

- Woven tape with a 100% “textured” polyester yarn in wrap and weft, which gives swelling to tape.
- Woven tape with slevedges.

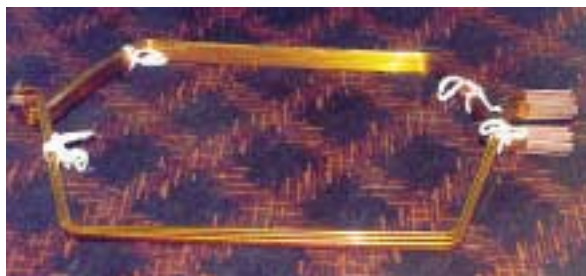


### 2 - CHARACTERISTICS

| REFERENCES  | UNITS      | T 022    | T 155    | T 224    | T 250    |
|---|------------|----------|----------|----------|----------|
| - THICKNESS   | mm         | 0,45     | 0,30     | 0,40     | 0,45     |
| - WIDTHS  | mm         | 13 to 60 | 10 to 40 | 10 to 40 | 10 to 40 |
| - WEIGHT PER METER  | g/cm width | 2        | 1,30     | 1,70     | 1,90     |
| - SHRINKAGE 1 h at 140 °C   | %          | 6        | ≥ 12     | 12       | 12       |
| - BREAKING RESISTANCE   | daN/cm     | 40       | 20       | 30       | 35       |
| - WEAVING   |            | SERGE    | CLOTH    | SERGE    | SERGE    |
| - 2 qualities: <b>UNBLEACHED - TREATED</b> : <i>waterproof or stiffening “A.R.I”</i> .          |            |          |          |          |          |
| - 3 treatments A.R.I : <b>A.R.I.L</b> : light - <b>A.R.I</b> : standard - <b>A.R.I.D</b> : hard |            |          |          |          |          |

### 3 - APPLICATIONS

- Electrotechnical industry, clothing industry, luggage industry, slippers, camping articles ( boarding tapes for tents ).
- Can replace a cotton serge tape. Many usings in industry.  
**Tape slightly shrinkable.**

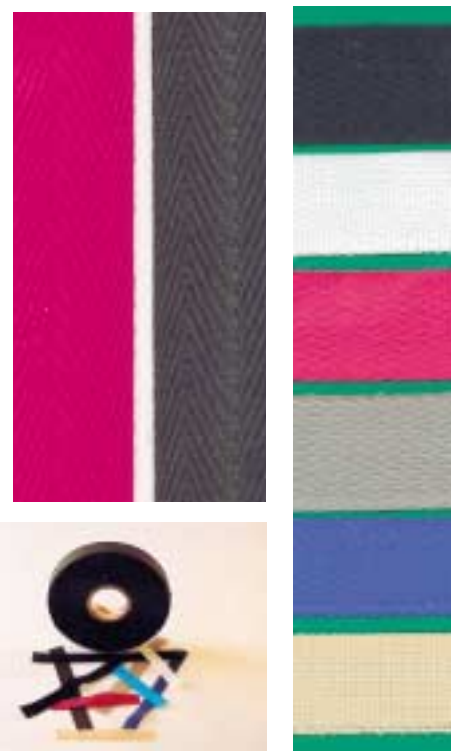

### 4 - PRESENTATION

- **Conditioning:**  
jaws bobbins or rolls.

#### - Colours :

Electrotechnical : unbleached.

Others: red, black, dark green, yellow, green of army, royal blue, grey, navy blue, light blue, beige, purple, carmine, turquoise, bright green, fuschia, light beige, light grey, orange, dark grey.



*We recommend to protect them from humidity at a temperature between - 10 and + 30 °C.*